


Wabo®SeismicSpan II

Heavy Duty Seismic Expansion Control System

| Features | Benefits |
|--|--|
| <ul style="list-style-type: none"> • Multi-directional movement | System maintains functionality during seismic events |
| <ul style="list-style-type: none"> • Accommodates wide openings | Standard systems designed for joint openings up to 18 inches. |
| <ul style="list-style-type: none"> • Variable materials | Aluminum or stainless steel versions are available. |
| <ul style="list-style-type: none"> • Design flexibility | Custom solutions can be created for job specific requirements. |

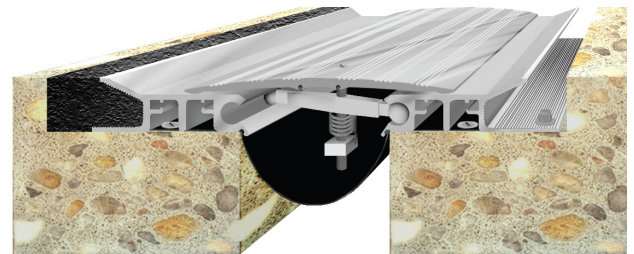

DESCRIPTION:

The Wabo®SeismicSpan II system is recommended for wider joint openings exposed to heavy loading or when design considerations call for the ability to accommodate multi-directional seismic movement. APX model complies with ADA guidelines.

RECOMMENDED FOR:

For use in various construction projects including:

- Convention centers with wider joint openings.
- Exposure to heavy traffic loading
- Designs that require multi-directional seismic movement.
- Wherever a load carrying, heavy duty cover plate is specified.

PACKAGING/COVERAGE:


- Aluminum Profiles: standard 10 ft lengths
- Moisture Barrier: longest possible continuous length
- Accessories: packaged in manufacturer's standard labeled carton
- Shipped on an 11 foot pallet




TECHNICAL DATA:

Design Information:

The APS model has a surface mounted cover plate while the APX's cover plates are recessed. Both slide and cover plates are available in aluminum or stainless steel. A fabric re-inforced moisture barrier combined with WaboCrete II edge void filler enhances the system's water resistant integrity. The self-centering seismic devices allow the slide plate to return to its natural position after a seismic occurrence

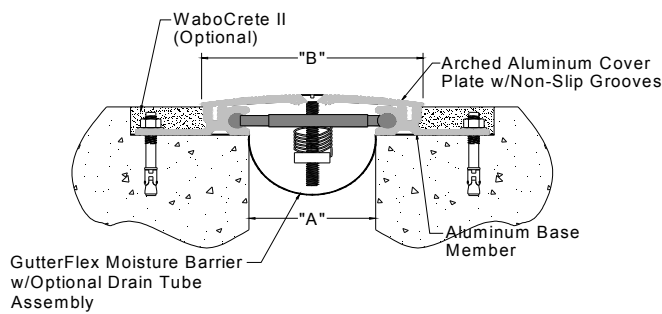

Model APS

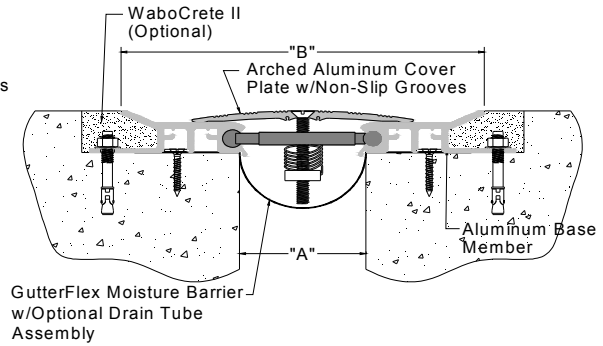

Model APX

Note: see product sales drawings for additional details

Movement Table

| Model Number | Joint Opening "A" | | | | | |
|---------------|-------------------|----|--------|-----|--------|-----|
| | Min. | | Max. | | Total | |
| | inches | mm | inches | mm | inches | mm |
| APX-200/400 | 1.250 | 32 | 6.0 | 153 | 4.75 | 121 |
| APX-600/800 | 1.250 | 32 | 12.0 | 306 | 10.75 | 273 |
| APX-1000/1200 | 1.250 | 32 | 18.0 | 459 | 16.75 | 425 |
| APS-200/400 | 1.250 | 32 | 6.0 | 153 | 4.75 | 121 |
| APS-600/800 | 1.250 | 32 | 12.0 | 306 | 10.75 | 273 |
| APS-1000/1200 | 1.250 | 32 | 18.0 | 459 | 16.75 | 425 |

Note: Additional sizes available, contact WBA for details. When specifying a corner condition, add a "C" after the model number.



APPLICATION:

Installation Summary:

- Blockouts must be made to the dimensions and elevations shown on the standard system drawings.
- Finish grade should be made perpendicular to the joint opening extending to 2 feet on each side of floor slab.
- Tolerance should be flush with zero vertical offset as determined by a 6 foot straight edge.
- Protect all expansion joint component parts from damage during installation.
- Expansion joint system should be set to proper width at the given ambient temperature at time of installation.
- Refer to WBA installation procedure for additional information.

Related Documents:

- Material Safety Data Sheets
- Wabo[®]SeismicSpan II Specification
- Wabo[®]SeismicSpan II CAD Drawings
- Wabo[®]SeismicSpan II Installation Procedure

For Best Results:

- Install when concrete substrate is clean, sound, dry, and cured (14 day minimum).
- Do not install if the joint's anticipated movement will exceed the system's movement range.
- Protect the work area with appropriate plastic sheeting.
- Do not allow any of the components to freeze prior to installation. Store all components out of direct sunlight in a clean, dry location between 50°F and 90°F.
- Shelf life of chemical components is approximately 1 year.
- Periodically inspect the installed material and repair localized areas as needed. Consult a Watson Bowman Acme representative for additional information.
- Make certain the most current version of the product data sheet is being used. Please consult the website (www.wbacorp.com) or contact a customer service representative.
- Proper application is the responsibility of the user. Field visits by Watson Bowman Acme personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the jobsite.



LIMITED WARRANTY:

Watson Bowman Acme warrants that this product conforms to its current applicable specifications. WATSON BOWMAN ACME MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. The sole and exclusive remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the sole option of Watson Bowman Acme. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL WATSON BOWMAN ACME BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Other warranties may be available when the product is installed by a factory trained installer. Contact your local Watson Bowman Acme representative for details. The data expressed herein is true and accurate to the best of our knowledge at the time published; it is, however, subject to change without notice.

Contact

Watson Bowman Acme, 95 Pineview Drive, Amherst, NY 14228
phone: 716-691-7566 / fax: 716-691-9239 / web site: <http://www.wbacorp.com>

WaboSeismicSpan II _1207